

MA7200 Rear Panel Connections

DIGITAL AUDIO INPUTS for components with Digital Optical and Coaxial Outputs sending digital audio signals

USB DIGITAL AUDIO INPUT for connection to a computer

DATA PORTS send signals to Source Components to allow control with the MA7200 Remote Control

IR Input for signals from a compatible IR Room Sensor

POWER CONTROL MAIN OUTPUT sends turn On/Off signals to a McIntosh Component when the MA7200 is switched On/Off

MCT DIGITAL AUDIO INPUT for streaming high bandwidth digital signals from SACD/CD Transport Components


SERVICE PORT for service use only

RS232 connector¹ for connection to a computer or other control device

POWER CONTROL OUTPUTS TRIGger 1 and 2 send turn On/Off signals to assignable components

Right OUTPUT connections for a 2, 4 or 8 ohm Loudspeaker

Left OUTPUT connections for a 2, 4 or 8 ohm Loudspeaker

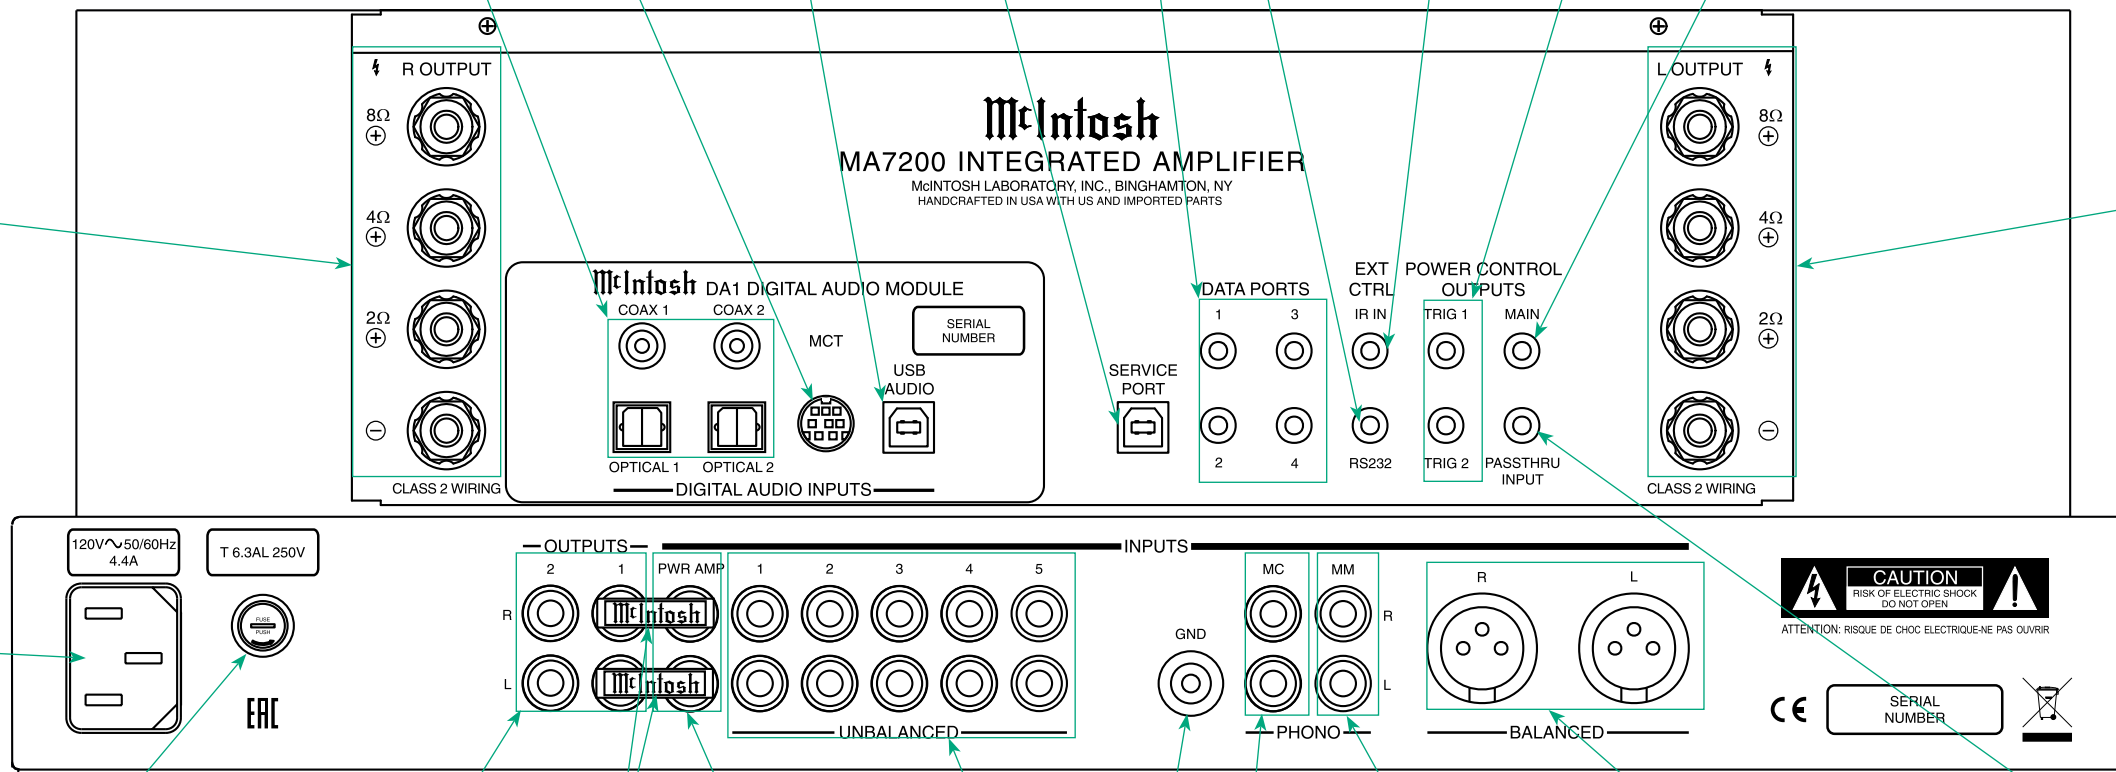

Connect the MA7200 power cord to a live AC outlet. Refer to information on the back panel of your MA7200 to determine the correct voltage for your unit

Main Fuse holder, refer to information on the back panel of your MA7200 to determine the correct fuse size and rating

OUTPUTS 2 send signals to Power Amplifiers and are switched On/Off with the Front Panel Output 2 Push-Button or Remote Control Push-Button

JUMPER PLUGS connect the Preamplifier OUTPUT 1 Jacks to the PWR AMP INPUTS Jacks and are required for normal operation

PWR AMP INPUTS accept signals from the internal Preamplifier or a separate external Preamplifier

UNBALANCED INPUTS 1 thru 5 accept high level program source signals

GND terminal accepts a ground wire from a turntable

PHONO MC accepts the low level signals from a Moving Coil Phono Cartridge

PHONO MM accepts signals from a Moving Magnet Phono Cartridge

BALANCED INPUTS accept high level program source signals

POWER CONTROL PASSTHRU INPUT receives turn On/Off signals from an Audio/Video Control Center

¹ Refer to page 3 of the MA7200 Owner's Manual for addition cable information.